



General Purpose Measuring Module

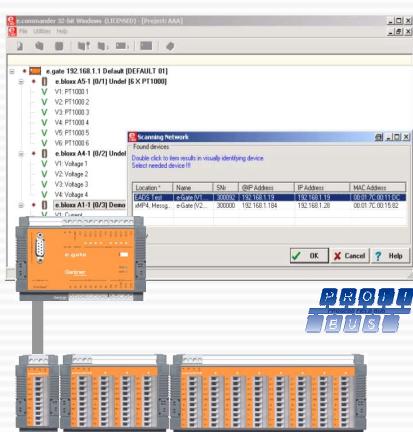

The e.bloxx series is designed for industrial and experimental test systems requiring precise high speed measurement of electrical, thermal and mechanical quantities in engine- and component test beds.

All units are based on a clean modular design and all have a wide variety of field device connection possibilities. Sample rates up to 1000 Hz and resolutions up to 19 bit are possible depending on the module and signal type used. Standardized communication protocols (Profibus-DP and Modbus-RTU) allow the e.bloxx family to work with a wide variety of application hardware and software.

With the addition of an e.gate the data throughput and connectivity options increase dramatically. The e.gate is a data concentrator and communication gateway, with 100 Mbps Ethernet and 12 Mbps Profibus-DP ports standard.

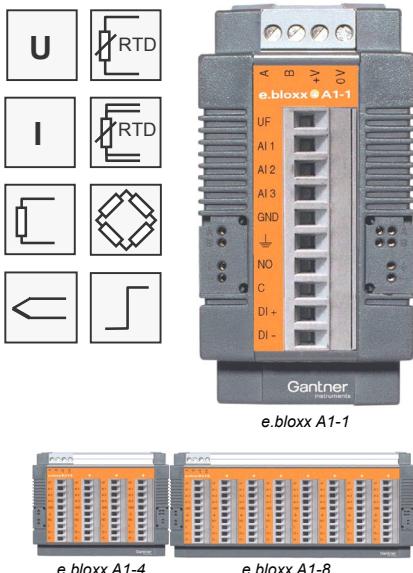

Order Information

Product	Article No.
e.bloxx A1-1	897428
e.bloxx A1-4	941418
e.bloxx A1-8	941519
Accessories	
Configuration Software	
ICP 100	633214
Cold Junction Compensation	
e.bloxx Terminal CJC	111874
Interface Converter	
RS232 / RS485	
ISK 200	229682
ISK 101	689326
Repeater / Converter IRK 100	236213

Additional Features

- Accuracy 0,01 %
- ADC resolution and calculation accuracy of 19 bit
- Measuring rate up to 1000 samples/sec
- Linearization, scaling and data formatting
- Data transmission up to 1,5 Mbps
- Up to 127 modules at one two wire line via RS-485 interface
- PC-Software ICP 100 for easy configuration of the modules
- Galvanic isolation of I/O-signals, power supply and communication interface
- Power supply 10...30 VDC
- DIN rail mounting (EN 50022 rail)
- Pluggable screw terminals for field, power and communication connections
- Electromagnetic Compatibility according to EN 61000-4 and EN 55011

e.bloxx A1 Technical Data

Analog Input

Accuracy	0.01 % typical 0.02 % in controlled environment ¹
Repeatability	0.05 % in industrial area ² 0.003 % typical (within 24 h)
Measuring range	Range Accuracy Resolution
Voltage	±10 V ±2 mV 40 µV
	±1 V ±0.2 mV 4 µV
	±100 mV ±20 µV 0.4 µV
	±10 mV ±10 µV 0.04 µV
Current	4-20 mA ±4 µA 80 nA
(internal shunt 100 Ω)	±20 mA ±4 µA 80 nA
Resistance (2-, 3- and 4-wire)	4 kΩ ±1 Ω 0.05 Ω
Resistance (2-, 3- and 4-wire)	2 kΩ ±0.6 Ω 0.03 Ω
Bridge (Supply 5 VDC)	±8 mV/V ±8 µV/V 0.4 µV/V
RTD (2-, 3- and 4-wire)	±2 mV/V ±2 µV/V 0.1 µV/V
Pt100 (-200 to +850 °C)	±0.5 °C 0.1 °C
Pt100 (-200 to +250 °C)	±0.2 °C 0.01 °C
Pt1000 (-200 to +850 °C)	±1 °C 0.1 °C
Pt1000 (-200 to +140 °C)	±0.3 °C 0.01 °C
Thermocouples	
Type B:	better than ±5 °C
Type E, J, K, L, T, U	better than ±1 °C
Type N	better than ±2 °C
Type R, S	better than ±3 °C
Common mode voltage	500 V permanent
Linearity deviation	0.01 % of the final value
Temperature influence on zero	1 µV / 10 °K
Temperature influence on sensitivity	0.02 % / 10 °K
Long-time drift	1 µV / 24 h; 0.1 µA / 24 h

Analog/Digital Conversion

Resolution	19 bit
Sample rate	1000 samples/sec for voltage, current potentiometer, bridge 10 samples/sec for resistance, RTD 5 samples/sec for thermocouples
Conversion method	Sigma-Delta
Filter	Anti-aliasing Bessel filter 4 th ord. 200 Hz variable digital low pass filter 1 st order averaging

Digital In-/Output

Input	Status, tare, reset
Input voltage	max. 30 VDC
Input current	max. 1.5 mA
Upper switching threshold	> 10 V (high)
Lower switching threshold	< 2.0 V (low)
Output	Relay output
Contact	Opto – MOSFET
Nominal load	60 VDC / 100 mA (ohmic load)
Galvanic isolation	500 V

Communication Interface

Standard	RS 485, 2-wire
Data format	8E1
Protocols	ASCII, Modbus-RTU, Profibus-DP Local-Bus
Baud rate	19.2; 38.4; 57.6; 93.75; 115.2 kBaud
ASCII and ModBus-RTU	19.2; 93.75; 187.5; 500; 1500 kBaud
Profibus-DP	19.2; 38.4; 57.6; 93.75; 115.2;
Local-Bus	187.5; 500; 1500 kBaud
Connectable devices	up to 32 without repeater
Galvanic isolation	up to 127 with repeater
	500 V

Power Supply

Power supply	10 to 30 VDC overvoltage and overload protection
Power consumption	
e.bloxx A1-1	approx. 1.5 W
e.bloxx A1-4	approx. 6 W
e.bloxx A1-8	approx. 12 W
Influence of the voltage	0.001 %/V

Mechanical

Case:	Aluminium and ABS
Dimensions (W x H x D) and weight	
e.bloxx A1-1	(845 x 90 x 83) mm, 160 g
e.bloxx A1-4	(104 x 90 x 83) mm, 500 g
e.bloxx A1-8	(186 x 90 x 83) mm, 900 g
Protective system	IP20
Mounting	DIN EN-Rail

Environmental

Operating temperature	-20 °C to +60 °C
Storage temperature	-30 °C to +60 °C
Relative humidity	0 % to 95 % at 50 °C
	non condensing

Warm Up Time

All declarations are valid after a warm up time of 45 minutes.

¹ according to EN 61326: 1997, appendix B

² according to EN 61326: 1997, appendix A

Valid from 19. April 2004. Specification subject to change without notice.

DB_EBLOXX_A1_E_15.doc